


## IP 44 KIT Installation

### Product description

- Protective casing for electronic ballasts
- For outdoor applications with high relative humidity
- IP 4x = protected against solid objects over 1 mm
- IP x4 = splash-proof

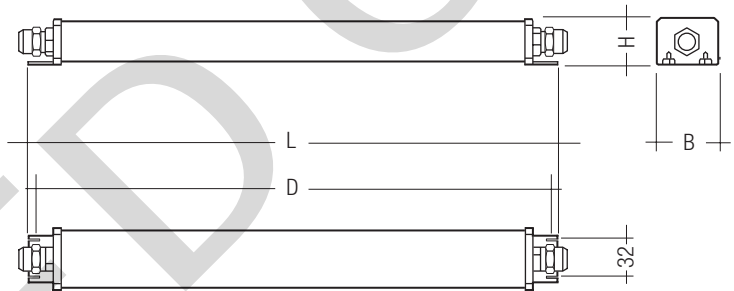

### Ordering data

Dimensions LxWxH	Distance between mounting holes (D)	Type	Article number
345 x 53 x 39 mm	335 mm	IP 44 KIT SHORT	24138842
520 x 53 x 39 mm	510 mm	IP 44 KIT LONG	24166189

Packaging: 40 pieces/carton, 480 pieces/pallet

#### Description of IP 44 KIT

Description	material	T° of deformation	colour
<b>End cap</b>	DUROLON HFR 1900 "crystal"	135 °C	Grey
<b>Tube</b>	Rigid PVC (Polychlorure de vinyle)	75 °C	Transparent
<b>PG 11 gland</b>	Impact resistant Polystyrol	60 °C	Grey RAL 7035

#### Cable and PG 11 gland IP 44 KIT

Description	cable diameter mm	torque N/m	application
<b>Primary cable</b>	∅ ext. 6.30, ±0.2	12	all ballasts
<b>Secondary cable</b> 6 conductor	∅ ext. 7.80, ±0.2	12	single lamp twin lamp
<b>Secondary cable</b> 10 conductor	max. ∅ 9	10	ballast 3x18 W ballast 4x18 W

#### Screw type recommendation

Type	diameter	material	reference	length (mm)
<b>Screw</b>	M4	Inox	NFE 25 129	16
<b>Nut</b>	M4	Inox A2	DIN 934	–

#### Ballast compatibility

For IP 44 KIT SHORT to max. 280 mm device length.

For IP 44 KIT LONG to max. 456 mm device length.