




### PC T5 TEC, 14 – 28 W PC TEC T5

#### Product description

- CELMA Energy Efficiency Index A2
- Nominal life time up to 30,000 h (at ta 50 °C with a failure rate max. 0.3 % per 1,000 h)
- Large temperature range (for values see table)
- Reduced lamp preheating for min. 5,000 starts without replacement of lamps (3,000 for 1x14 W and 1x21 W applications)
- Automatic start after replacement of defective lamps (details on page 4)
- Safety shutdown of defective lamps and at end of lamp life
- Temperature protection as per EN 61347-2-3 C5e

#### Technical data

Mains voltage range	220 – 240 V
AC voltage range	198 – 264 V
Mains frequency	50 / 60 Hz
Overvoltage protection	320 V AC, 1 h
Time to light	≤ 2 s
Operating frequency	≥ 40 kHz
Type of protection	IP 20

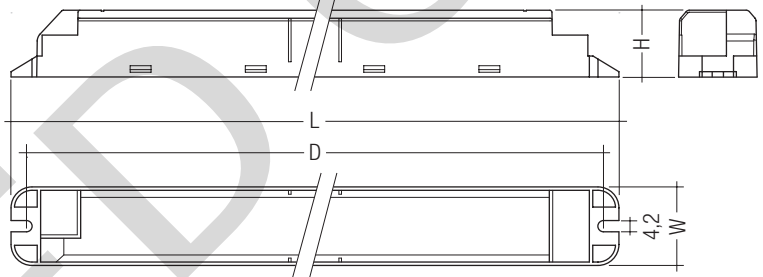

Standards, page 2

Wiring diagrams and installation examples, page 5

#### Ordering data

Type	Article number	Packaging carton	Packaging Pallet	Weight per pc.
<b>For luminaires with 1 lamp</b>				
PC 1x14 T5 TEC	87500121	60 pc(s).	1,440 pc(s).	0.084 kg
PC 1x21 T5 TEC	87500125	60 pc(s).	1,440 pc(s).	0.093 kg
PC 1x28 T5 TEC	87500127	60 pc(s).	1,440 pc(s).	0.096 kg
<b>For luminaires with 2 lamps</b>				
PC 2x14 T5 TEC	87500122	60 pc(s).	1,440 pc(s).	0.112 kg
PC 2x28 T5 TEC	87500128	60 pc(s).	1,440 pc(s).	0.142 kg
<b>For luminaires with 3 lamps</b>				
PC 3x14 T5 TEC	87500123	60 pc(s).	1,080 pc(s).	0.196 kg
<b>For luminaires with 4 lamps</b>				
PC 4x14 T5 TEC	87500124	60 pc(s).	2,160 pc(s).	0.100 kg

#### Specific technical data

Lamp wattage	Lamp type	Type	Article number	Dimensions LxWxH	Hole spacing D	Lamp power	Circuit power	EEL	Current at 50 Hz		λ at 50 Hz		tc point max.	Temperature range ta	tc / ta for ≥ 30,000 h	
									220 V	240 V	220 V	240 V				
<b>For luminaires with 1 lamp</b>																
1 x 14 W	T5	PC 1x14 T5 TEC	87500121	210 x 30 x 25.5 mm	198.0 mm	14.0 W	18.0 W	A2	0.08 A	0.09 A	0.95	0.95	65 °C	0 ... 50 °C	65 / 50 °C	
1 x 21 W	T5	PC 1x21 T5 TEC	87500125	210 x 30 x 25.5 mm	198.0 mm	20.0 W	24.5 W	A2	0.11 A	0.12 A	0.95	0.95	65 °C	0 ... 50 °C	65 / 50 °C	
1 x 28 W	T5	PC 1x28 T5 TEC	87500127	210 x 30 x 25.5 mm	198.0 mm	27.0 W	33.0 W	A2	0.15 A	0.16 A	0.95	0.96	65 °C	0 ... 50 °C	65 / 50 °C	
<b>For luminaires with 2 lamps</b>																
2 x 14 W	T5	PC 2x14 T5 TEC	87500122	275 x 30 x 25.5 mm	263.2 mm	28.0 W	33.5 W	A2	0.15 A	0.16 A	0.95	0.95	65 °C	0 ... 50 °C	65 / 50 °C	
2 x 28 W	T5	PC 2x28 T5 TEC	87500128	275 x 30 x 25.5 mm	263.2 mm	54.0 W	65.8 W	A2	0.30 A	0.30 A	0.95	0.95	65 °C	0 ... 50 °C	65 / 50 °C	
<b>For luminaires with 3 lamps</b>																
3 x 14 W	T5	PC 3x14 T5 TEC	87500123	314 x 35 x 27 mm	302.0 mm	42.0 W	47.5 W	A2	0.22 A	0.22 A	0.95	0.95	65 °C	0 ... 50 °C	65 / 50 °C	
<b>For luminaires with 4 lamps</b>																
4 x 14 W	T5	PC 4x14 T5 TEC	87500124	260 x 40 x 25.5 mm	250.0 mm	56.0 W	66.0 W	A2	0.30 A	0.30 A	0.95	0.95	65 °C	0 ... 50 °C	65 / 50 °C	

**Standards**

CISPR 15  
EN 61000-3-2  
EN 61347-2-3  
EN 61547

**AC operation**

Mains voltage:  
220 – 240 V 50 / 60 Hz  
176 – 264 V 50 / 60 Hz including safety  
tolerance (+10 % / – 20 %)  
198 – 264 V 50/60 Hz including performance  
tolerance (±6 %)

Below 198 V<sub>ac</sub> for sustained periods  
of time with reduced ballast life.

**Ambient Temperature**

0 °C to +50 °C

**Harmonic distortion in the mains supply**

Type	Lamp type	Wattage	THD at 230 V / 50 Hz
PC 1x14 T5 TEC	T5	1x14 W	< 20 %
PC 1x21 T5 TEC	T5	1x21 W	< 20 %
PC 1x28 T5 TEC	T5	1x28 W	< 20 %
PC 2x14 T5 TEC	T5	2x14 W	< 15 %
PC 2x28 T5 TEC	T5	2x28 W	< 15 %
PC 3x14 T5 TEC	T5	3x14 W	< 20 %
PC 4x14 T5 TEC	T5	4x14 W	< 15 %


**Working voltage**

Type	Lamp type	Wattage	U <sub>out</sub>
PC 1x14 T5 TEC	T5	1x14 W	380 V
PC 1x21 T5 TEC	T5	1x21 W	380 V
PC 1x28 T5 TEC	T5	1x28 W	380 V
PC 2x14 T5 TEC	T5	2x14 W	380 V
PC 2x28 T5 TEC	T5	2x28 W	430 V
PC 3x14 T5 TEC	T5	3x14 W	430 V
PC 4x14 T5 TEC	T5	4x14 W	430 V


**Ballast lumen factor (EN 60929 8.1)**

Type	Lamp type	Wattage	AC-BLF at U = 230 V, 25 °C
PC 1x14 T5 TEC	T5	1x14 W	1.00 (±10 %)
PC 1x21 T5 TEC	T5	1x21 W	1.00 (±10 %)
PC 1x28 T5 TEC	T5	1x28 W	1.00 (±10 %)
PC 2x14 T5 TEC	T5	2x14 W	1.00 (±10 %)
PC 2x28 T5 TEC	T5	2x28 W	1.00 (±10 %)
PC 3x14 T5 TEC	T5	3x14 W	1.00 (±10 %)
PC 4x14 T5 TEC	T5	4x14 W	1.00 (±10 %)

All data are typical values

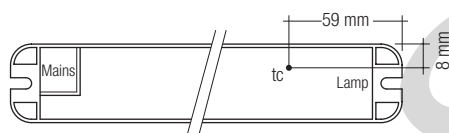


PC 1x14 T5 TEC

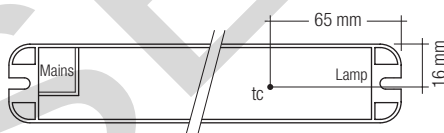


PC 2x28 T5 TEC




PC 1x21 T5 TEC  
PC 1x28 T5 TEC

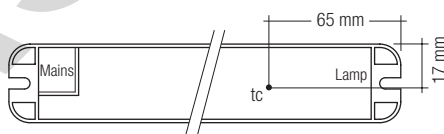

PC 3x14 T5 TEC

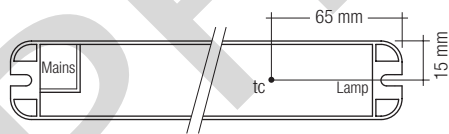

PC 2x14 T5 TEC

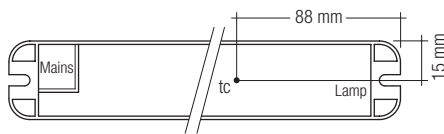

PC 4x14 T5 TEC

The tc point is related to the ballast life duration.

PC T5 TEC is designed for an average service life of 30,000 hours under reference conditions and with a failure rate of less than 0.3 % for every 1,000 hours of operation.

Reduced temperature will extend ballast life time.

Humidity: 5 % up to max. 85 %, not condensed (max. 56 days/year at 85 %)

Storage temperature: -40 °C up to max. +80 °C

The devices have to be within the specified temperature range (ta) before they can be operated.

#### Expected lifetime

Type	Lamp type	Lamp power	ta	40 °C	50 °C	60 °C
PC 1x14 T5 TEC	T5	1x14 W	tc	55 °C	65 °C	x
			Lifetime	50,000 h	30,000 h	x
PC 1x21 T5 TEC	T5	1x21 W	tc	55 °C	65 °C	x
			Lifetime	50,000 h	30,000 h	x
PC 1x28 T5 TEC	T5	1x28 W	tc	55 °C	65 °C	x
			Lifetime	50,000 h	30,000 h	x
PC 2x14 T5 TEC	T5	2x14 W	tc	55 °C	65 °C	x
			Lifetime	50,000 h	30,000 h	x
PC 2x28 T5 TEC	T5	2x28 W	tc	55 °C	65 °C	x
			Lifetime	50,000 h	30,000 h	x
PC 3x14 T5 TEC	T5	3x14 W	tc	55 °C	65 °C	x
			Lifetime	50,000 h	30,000 h	x
PC 4x14 T5 TEC	T5	4x14 W	tc	55 °C	65 °C	x
			Lifetime	50,000 h	30,000 h	x

x = not permitted

#### Maximum loading of automatic circuit breakers

Automatic circuit	C10	C13	C16	C20	B10	B13	B16	B20	Inrush current
Installation Ø	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	I <sub>max</sub> Pulse
PC 1x14 T5 TEC	60	80	100	120	30	40	50	60	6.7 A 111 µs
PC 1x21 T5 TEC	50	70	80	100	25	35	40	50	11.6 A 143 µs
PC 1x28 T5 TEC	50	70	80	100	25	35	40	50	11.4 A 162 µs
PC 2x14 T5 TEC	50	70	80	100	25	35	40	50	11.5 A 128 µs
PC 2x28 T5 TEC	30	40	50	60	15	20	25	30	20.3 A 143 µs
PC 3x14 T5 TEC	30	40	50	60	15	20	25	30	13.9 A 175 µs
PC 4x14 T5 TEC	30	40	50	60	15	20	25	30	19.1 A 150 µs

#### Wiring advice

The lead length is dependant on the capacitance of the cable.  
Earthing is not required for the device to operate.  
Connection to earth reduces radio interference.

With standard solid wire 0.5/0.75 mm<sup>2</sup> the capacitance of the lead is approx. 80 pF/m. This value is influenced by the way the wiring is made.  
In borderline cases the capacitance must be measured inside the luminaire.  
Keep lamp wires short. Lamp connection with twin ballast should be made with symmetrical wiring.  
Hot leads and cold leads should be separated as much as possible.

Ballast	Terminals	Maximum capacitance allowed	
		Cold	Hot
PC 1xx T5 TEC	11, 12	13, 14	220 pF 100 pF
PC 2xx T5 TEC	10, 11, 12	8, 9, 13, 14	220 pF 100 pF
PC 3xx T5 TEC	9, 10	11, 12, 13, 14, 15, 16	220 pF 100 pF
PC 4xx T5 TEC	11, 12, 15, 16, 19, 20	13, 14, 17, 18	200 pF 100 pF

To avoid the damage of the control gear, the wiring must be protected against short circuits to earth (sharp edged metal parts, metal cable clips, louver, etc.)


### Installation instructions

#### Wiring type and cross section

The wiring can be in stranded wires with ferrules or solid with a cross section of 0.5 – 1.5 mm<sup>2</sup>.


Strip 8.5–9.5 mm of insulation from the cables to ensure perfect operation of the push-wire terminals.

wire preparation:  
0.5 – 1.5 mm<sup>2</sup>



#### Release of the wiring

Press down the "push button" and remove the cable from front.



#### RFI

Tridonic ballasts are RFI protected in accordance with CISPR 15. To operate the luminaire correctly and to minimise RFI we recommend the following instructions:

- Connection to the lamps of the "hot leads" must be kept as short as possible (marked with \*)
- Mains leads should be kept apart from lamp leads (ideally 5–10 cm distance)
- Do not run mains leads adjacent to the electronic ballast
- Twist the lamp leads
- Keep the distance of lamp leads from the metal work as large as possible
- Connect functional earth over the terminal
- Mains wiring to be twisted when through wiring
- Keep the mains leads inside the luminaire as short as possible

#### Defective lamp

(Broken Filament, Rectifying Effect, Gas Defect)

If a lamp is defective then the ballast will either switch off and go into the stand-by mode or it will continue to run the lamp in a safe mode of operation.

- **Ballasts for luminaires with 1 lamp:** automatic restart after lamp is replaced.
- **Ballasts for luminaires with 2 lamps:**
  - PC 2x14 T5 TEC automatic restart after lamp is replaced.
  - PC 2x28 T5 TEC restart after mains reset.
- **Ballasts for luminaires with 3 and 4 lamps:** restart after mains reset.

#### T5 lamp information

	14 W	549 mm
	21 W	849 mm
	28 W	1149 mm

#### Isolation and electric strength testing of luminaires

Electronic devices can be damaged by high voltage. This has to be considered during the routine testing of the luminaires in production.

According to IEC 60598-1 Annex Q (informative only!) or ENEC 303-Annex A, each luminaire should be submitted to an isolation test with 500 V<sub>DC</sub> for 1 second. This test voltage should be connected between the interconnected phase and neutral terminals and the earth terminal.

The isolation resistance must be at least 2 MΩ.

As an alternative, IEC 60598-1 Annex Q describes a test of the electrical strength with 1500 V<sub>AC</sub> (or 1.414 x 1500 V<sub>DC</sub>). To avoid damage to the electronic devices this test must not be conducted.

#### Glow-wire test

according to EN 61347-1 with increased temperature of 850 °C passed.


#### Additional information

Additional technical information at  
[www.tridonic.com](http://www.tridonic.com) → Technical Data

Guarantee conditions at  
[www.tridonic.com](http://www.tridonic.com) → Services


No warranty if device was opened.

Wiring diagrams

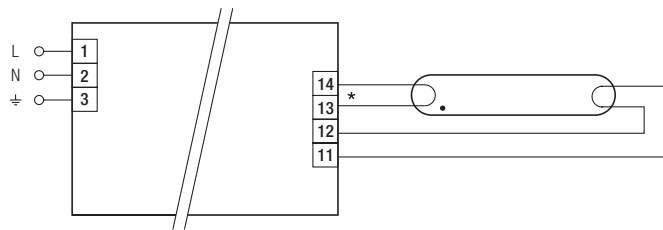


\* leads 13, 14 max. 1.0 m (< 100 pF)  
leads 11, 12 max. 2.0 m (< 200 pF)  
Protection class I - luminaires: earth of ground terminal required (according to IEC 60598)  
Protection class II - luminaires: no earth required

PC 1x14 T5 TEC,  
PC 1x21 T5 TEC,  
PC 1x28 T5 TEC

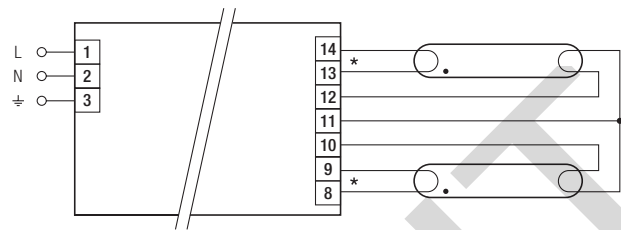


\* leads 8, 9, 13, 14 max. 1.0 m (< 100 pF)  
leads 10, 11, 12 max. 2.0 m (< 200 pF)  
Protection class I - luminaires: earth of ground terminal required (according to IEC 60598)  
Protection class II - luminaires: no earth required

PC 2x14 T5 TEC,  
PC 2x28 T5 TEC

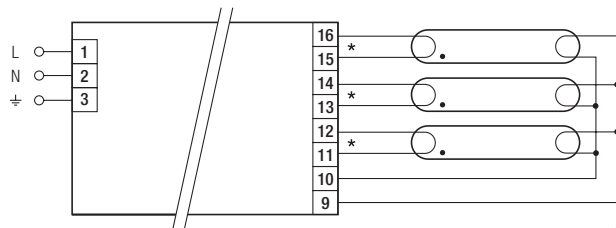

\* leads 11, 12, 13, 14, 15, 16 max. 1.0 m (< 100 pF)  
leads 9, 10 max. 2.0 m (< 200 pF)  
Protection class I - luminaires: earth of ground terminal required (according to IEC 60598)  
Protection class II - luminaires: no earth required

PC 3x14 T5 TEC

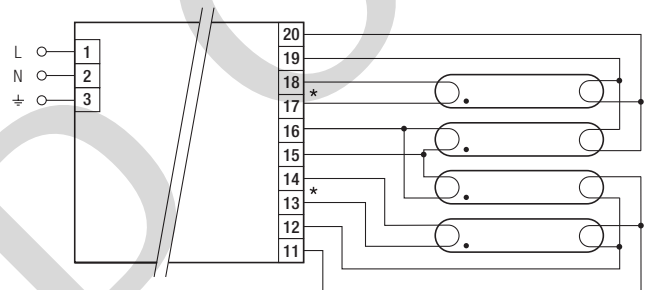

\* leads 13, 14, 17, 18 max. 1.0 m (< 100 pF)  
leads 11, 12, 15, 16, 19, 20 max. 2.0 m (< 200 pF)  
Protection class I - luminaires: earth of ground terminal required (according to IEC 60598)  
Protection class II - luminaires: no earth required

PC 4x14 T5 TEC